

# Ion Exchange Regains Limelight: Used as Treatment for Selective Ion Removal from Well Water

By C.F. “Chubb” Michaud, CWS-VI

**Summary:** Looking down the road, people will look to wells as their major source of water. The question now becomes—how best to remove the many contaminants living in the “ground” that affect water quality? A few options are presented here along with corresponding arguments.

Although pumping water from a river or lake poses less of a mechanical challenge for municipal water suppliers, groundwater supplied from wells may become the most reliable and plentiful water source for the future. There is nearly 50 times as much water contained underground than in all the rivers and lakes combined.<sup>1</sup> What’s more, every square inch of the Earth’s land mass has water somewhere beneath it.

Groundwater is but a fraction of the salinity of the oceans. Yet, more and more localities are turning to seawater desalination to supplement their fresh water supplies. Such a luxury, costing \$350 to \$400 per acre foot (ac ft)—about 325,000 gallons—is simply not a universal solution. Farmers accustomed to available water at a well for under \$50/ac ft may have a problem with costs as well.

Water is water. Even seawater is 96.5 percent pure. Well water, on the other hand, generally exceeds 99.9 percent in purity. That’s around 1,000 parts per mil-

lion (ppm) of total dissolved solids (TDS) with many wells much lower in salts contained. The main problem with tapping groundwater as the prime source of future water is... well, groundwater is full of “ground.”

## The grind of groundwater

Although Mother Nature does an excellent job of purifying seawater via the hydrologic cycle (evaporation/condensation/precipitation), the condensing water vapor becomes contaminated the instant the water droplets form. Atmospheric gasses such as naturally occurring carbon dioxide (CO<sub>2</sub>) as well as industrial gasses containing sulfur and nitrogen dissolve and react with the water to form dilute acids—carbonic, sulfuric, nitric, (see *Reaction 1*). “Pure” rainwater may contain 3 to 5 ppm of these acids (and upwards of 25 ppm near large industrial cities). As these acids soak into the ground, they leach minerals from solid rock to form neutral salts. Solid marble statuary exposed to atmo-


spheric weathering over the centuries demonstrates the aggressiveness of rainwater.

Water being the universal solvent that it is, anything contained in the soil can be leached into the groundwater as soluble salt. Many of these salts pose a level of toxicity associated with concentrations as low as parts per billion (ppb) levels.





Iron and manganese, for example, are common constituents of groundwater. These elements are usually found as soluble bicarbonates in water but can oxidize to insoluble hydroxides or carbonates on standing, and cause unsightly staining on clothes and porcelain fixtures. Iron and manganese also have an unpleasant taste even at low levels. The U.S. Environmental Protection Agency (USEPA) has set the suggested secondary maximum contaminant level (SMCL) for iron at 0.3 ppm and manganese at 0.05 ppm.

Some metals exist in their elemental or metallic form in soil and rock. Most, however, exist as oxides or crystalline salts. Reaction 2 shows a reaction sequence whereby iron (representing metal) is first oxidized and then attacked by rainwater and, finally, ends as a red layer of crud in the bathtub.

As a general rule, metal oxides will act as (or will form) bases in water. Examples include sodium oxide (to form

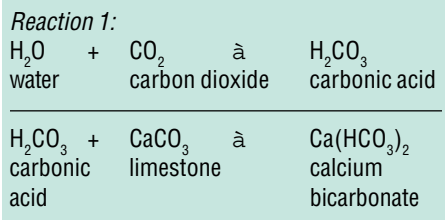

*Reaction 2:*



sodium hydroxide) and magnesium oxide (to form magnesium hydroxide). Non-metals (such as carbon, sulfur, nitrogen and chlorine) combine with oxygen in various ways and then combine with water to form acids (see examples given earlier). The acids and bases then combine to form salts and water (see *Reaction 3*).

Iron and manganese are often associated with H<sub>2</sub>S, a gas that gives water a rotten egg smell. H<sub>2</sub>S forms acid in water and is very corrosive to metals and metal oxides. Although the presence

of iron and manganese may not give rise to H<sub>2</sub>S, the presence of H<sub>2</sub>S will frequently give rise to the presence of iron and manganese.

### Other metals

Since all natural elements are found in the Earth's crust (and in seawater), one might assume it was the action of leaching by groundwater that transported the salt to the sea in the first place. Groundwater, therefore, can and does contain traces of all natural elements. Depending upon the make-up of the soil and aggressiveness of the groundwater, levels of metals in the water may exceed the USEPA enforceable maximum contaminant levels (MCLs) and require treatment. Many exist below current detection levels.


Although it might be unusual to find these contaminants present above 1

ppm, the tolerable limits are usually in the ppb ranges. If groundwater is to become a valued font of future water resources, ways must be devised to remove these trace contaminants effectively and economically.

### Options

Municipal water supplies are frequently treated with various operations including neutralization (to raise an acidic pH), oxidation (for microbiological groups), flocculation (as a means of capturing very small suspended solids), precipitation (to separate the solids from the water) and filtration (to remove the solids). By proper design, many trace level contaminants can be removed as part of these treatments. Frequently, larger municipalities have multiple sources of water that can be blended to reduce contaminants and adjust other properties. What about the little guys? Smaller municipalities and private well owners may not have the luxury of a large budget or multiple source choices. For specific ion reduction, the choices are often limited to reverse osmosis (RO) or ion exchange.

*Reaction 3:*



If the TDS is high (above 1,000 ppm) and must be reduced, RO is often the treatment of choice. In addition to a general TDS reduction, the specific trace contaminants will be reduced as well. Un-

treated water can usually be blended back for economics. RO, however, produces a large waste stream that may prove difficult to discharge (it will be more concentrated in contaminants than

the feed stream) without special (and expensive) post-treatment. Ion exchange, on the other hand, can be designed to selectively treat many trace contaminants independent of other ionic constituents. Ion exchange doesn't destroy the selected contaminants but can be used to produce a concentrate—often enriched thousands of times over the raw water—for which disposal can be more easily achieved.

Table 1 lists common contaminants successfully removed utilizing ion exchange resins as primary treatment.

Table 1. Selective ion exchange removal

Primary standards—Health related <sup>1</sup>					
Contaminant	MCL	Pre-treatment	Ion exchange	Comments	
Arsenic(+3)	0.010 mg/L (total As)	oxidation	SBA	Suitable for home use using NaCl or KCl as regenerant in a conventional water “softener” configuration	
Arsenic (+5)	"	none	SBA		
Barium	2 mg/L	none	SAC		
Beryllium	0.004 mg/L	none	SAC		
Cadmium	0.005 mg/L	none	SAC		
Chromium (+3)	0.1 mg/L (total Cr)	none	SAC		
Chromium (+6)	"	none	SBA		
Copper	1.3 mg/L (action level)	none	SAC		make sure of source
Cyanide	0.2 mg/L	none	SBA		TDS limited 25 lb/ft <sup>3</sup> regeneration
Fluoride	4.0 mg/L	none	SBA		
Lead	0.015 mg/L (action level)	none	SAC		
Mercury (+2)	0.0002 mg/L (inorganic)	none	SAC		
Mercury (-1)	"	none	SBA		
Nickel	0.1 mg/L	none	SAC		
Nitrate	10 mg/L	none	SBA	use selective resin	
Nitrite	1 mg/L	none	SBA	"	
Perchlorate	(under review)	none	SBA	regenerable/disposable	
Radium 226	5 pCi/L (combined)	none	SAC		
Radium 228	"	none	SAC		
Selenium (+4)	0.05 mg/L	none	SBA	non-selective	
Selenium (+6)	"	none	SBA	non-selective	
Thallium	0.002 mg/L	none	SAC		
Uranium	30 µg/L	none	SBA		

NOTE: SAC is strong acid cation resin. SBA is strong base anion resin. If using a SBA, pre-soften water if above 10 grains hardness. The combining of SAC and SBA in same vessel is discouraged if the aim is the removal of a hazardous contaminant. All systems are regenerable with NaCl or KCl except for chloride removal units.

**Secondary standards—Cosmetic effects<sup>2</sup>**

Contaminant	SMCL	Pre-treatment	Ion exchange	Comments
Aluminum (+3)	0.05 to 0.2 mg/L	none	SAC	prone to fouling
Chloride	250 mg/L	softener	SBA	use soda ash for regen
Iron (+2) ferrous	0.3 mg/L	none	SAC	use resin cleaner
Manganese (+2)	0.05 mg/L	none	SAC	use resin cleaner
Silver (+1)	0.10 mg/L	none	SAC/SBA*	
Sulfate	250 mg/L	none	SBA	
Zinc (+2)	5 mg/L	none	SAC	

NOTE: Ion exchange with salt regeneration does not reduce the TDS of the water. Treating high sulfate could result in a high chloride. Partial treatment and blending may be advised.

\* Silver nitrate removed best by SAC; silver cyanide by SBA.

1. National Primary Drinking Water Regulations (NPDWRs), or primary standards, are legally enforceable standards that apply to public water systems. Primary standards protect public health by limiting the levels of contaminants in drinking water. These are divided into microorganisms, disinfectants, disinfection by-products, inorganic chemicals, organic chemicals and radionuclides. For more information, see [www.epa.gov/safewater/mcl.html](http://www.epa.gov/safewater/mcl.html)

2. National Secondary Drinking Water Regulations (NSDWRs), or secondary standards, are non-enforceable guidelines regulating contaminants that may cause cosmetic effects (such as skin or tooth discoloration) or aesthetic effects (such as taste, odor, or color) in drinking water. USEPA recommends secondary standards to water systems but does not require systems to comply; however, states may choose to adopt them as enforceable standards. For more information, read “Guidance for Nuisance Chemicals” at [www.epa.gov/safewater/consumer/2ndstandards.html](http://www.epa.gov/safewater/consumer/2ndstandards.html)

**Conclusion**

Although ion exchange is not the only option, it is often the best choice because of the high specific ion selectivities of newer resins. Making the job of treating trace contaminants in well waters easier, ion exchange is re-opening wells previously closed down because of trace contaminants. Since the process lends itself to salt regenerating systems, it's becoming the treatment of choice for residential and small municipal systems. Designers and installers should be aware of local, state or federal discharge restrictions that may limit the utility of salt-regenerated systems.

**References**

1. Van der Leeden, Fritz, et al., *The Water Encyclopedia, 2nd Ed.*, Lewis Publishers, 1990.
2. Water Quality Association, *Recognized Treatment Techniques for Meeting Drinking Water Regulations with the Application of Point of Use Systems*, WQA, Lisle, Ill., 1993.
3. Michaud, C.F., “Regenerable Cartridges for POU,” *WC&P*, March 1995.

**About the author**

Chubb Michaud is technical director of Systematix Company, of Buena Park, Calif. A University of Maine graduate, he holds bachelor's and master's degrees in chemical engineering. He has over 35 years of field experience and holds several U.S. patents on ion exchange processes.



An active member of the Water Quality Association, Michaud serves on the Science Advisory Committee, Ion Exchange Task Force and chairs the Commercial/Industrial Section Committee. He serves on the Pacific WQA Board of Directors and chairs its Education Committee. He's also a founding member of the WC&P Technical Review Committee. He can be reached at email: [cmichaud@systematixUSA.com](mailto:cmichaud@systematixUSA.com)